

GÖLZ®



**Tile saws - Masonry saws -
Block saws**

www.goelz.de

GÖLZ®

Tile saws

NEW TS200/250

Professional tile cutting machines



Technical data- Information

- cutting head adjustable up to 45° (Jolly cutting)
- diamond blade Ø 200 mm / 250 mm
- removable water tub
- electric water pump with quick coupler
- foldable legs
- transport wheels
- adjustable angle stop
- removable cutting table for easier cleaning
- dimension TS200: 1000x520x1250 mm
- dimension TS250: 1280x520x1250 mm
- weight TS200: 47 kg
- weight TS250: 55 kg

Technical data:	GÖLZ TS200	GÖLZ TS250
Motor:	electric, 230 V, 50 Hz, IP54	electric, 230 V, 50 Hz, IP54
Power:	1,3kW/P1 (1,77 HP)	1,3 kW/P1 (1,77 HP)
Max. cutting depth:	40 mm	65 mm
Max. blade size:	200 x 25,4 mm	250 x 25,4 mm
Max. cutting length:	720 mm	1000 mm
Water pump:	S2, 230 V, 50 Hz, 55 Watt	S2, 230 V, 50 Hz, 55 Watt
Dimension (LxBxH):	1000x520x1250 mm	1280x520x1250 mm
Weight:	47 kg	55 kg

GÖLZ[®]

Masonry saws

NEW
MS400



Ultra compact and light-weight masonry saw with high cutting performance for the landscaper and construction business

Technical data- Information

- height adjustable cutting head
- huge cutting table: 600x530 mm
- tool kit
- manual cutting device
- removable water tub
- foldable legs
- for safety reasons extra handle for moving the cutting table
- fixing device of cutting table during transport
- adjustable angle stop
- electric water pump with quick coupler
- dimension: 959x840x1284 mm
- weight: only 66 kg

Technical data:	GÖLZ MS400
Motor:	electric, 230 V, 50 Hz, IP54
Power:	2,2 kW/P1 (3 HP)
Max. cutting depth:	137 mm
Max. blade size:	400 x 25,4 mm
Max. cutting length:	700 mm
Water pump:	S2, 230 V, 50 Hz, 55 Watt
Dimension (LxBxH):	959x840x1284 mm
Weight:	66 kg

GÖLZ[®]

Masonry saw

NEW
MS400A

High-quality aluminum table saw for the universal use on the construction site



cutting head adjustable up to 45°



removable water tub



transport wheels



quick coupling of water pump



transport handles



foldable legs

Technical data- Information

- height adjustable cutting head
- large cutting table: 550x550mm
- fixing device of cutting table during transport
- cutting device
- tool kit
- adjustable angle stop
- removable water tub
- foldable legs
- electric water pump with quick coupler
- dimension: 1277x692x1252 mm
- weight: only 79 kg

Technical data:	GÖLZ MS400A
Motor:	electric, 230 V, 50 Hz, IP54
Power:	2,2 kW/P1 (3 HP)
Max. cutting depth:	137 mm
Max. blade size:	400 x 25,4 mm
Max. cutting length:	700 mm
Water pump:	S2, 230 V, 50 Hz, 55 Watt
Dimension:	1277x692x1252 mm
Weight:	79 kg


Powerful and robust masonry saw with removable water tub.

Technical data- Information

- exact cast iron cutting table with steel bearing rollers for exact cuts and long life time
- separate button for disconnecting of the water pump
- removable water tube
- height adjustable cutting head
- cutting device
- parallel guidance of the cutting head
- adjustable angle stop
- pluggable blade quard for easy changing of diamond blade
- pluggable legs, 2 with transport wheels
- electric water pump
- impact resistant powder coating



max. blade size: 450 mm
160 mm cutting depth

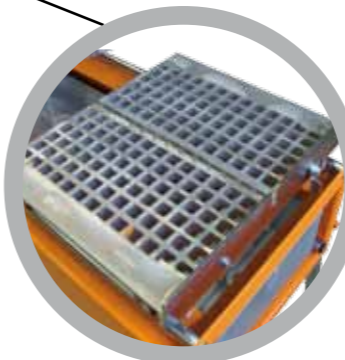


cast iron cutting table




transport wheels



optional in 230V or 400V version

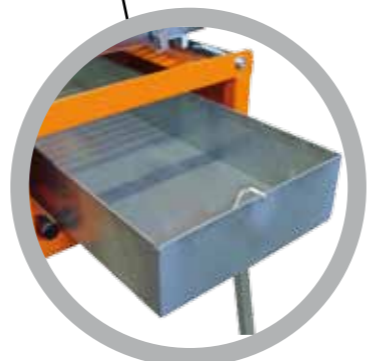

removable water tub,
zinc coated steel sheet

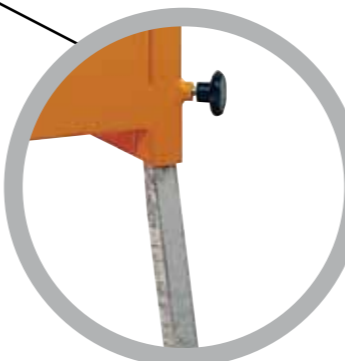

pluggable leg

Technical data:	GÖLZ ST450	GÖLZ ST450S
Motor:	electric, 230 V, 50 Hz, IP54	electric, 400 V, 50 Hz, 16 A, IP 54
Power:	2,2 kW (3 HP)	3,0 kW (4 HP)
Max. cutting depth:	160 mm	160 mm
Max. blade size:	450 x 25,4 mm	450 x 25,4 mm
Max. cutting length:	650 mm	650 mm
RPM:	2650 min ⁻¹	2650 min ⁻¹
Dimension cutting table:	400x480 mm, cast iron	400x480 mm, cast iron
45° cutting device:	optional	optional
Water pump:	G1, 230V, 50/60 Hz, 35 Watt	G1, 230V, 50/60 Hz, 35 Watt
Transport wheels:	yes	yes
Dimension:	1130x590x1370 mm	1130x590x1370 mm
Weight:	106 kg	106 kg



230 V electric motor



Ø 500 mm diamond blade cutting depth up to 200 mm



exchangeable guiding rails of cutting table



foldable legs



transport wheels



cutting length 550 mm



stainless steel cutting table

Robust masonry saw, made for cutting of blocks like Poroton, Bims, aerated concrete, concrete and universal purpose

Technical data- Information


- max. cutting depth: 200 mm
- max. cutting length: 550 mm
- stainless steel cutting table with cutting device with steel bearing rollers
- transport wheels for easy loading and unloading on jobsite
- foldable legs
- electric water pump

Technical data:	GÖLZ ST500
Motor:	electric, 230 V, 50 Hz, IP54
Power:	3,0 kW/P1 (4,08 HP)
RPM:	1935 min ⁻¹
Max. cutting depth:	200 mm
Max. blade size	500 x 25,4 mm
Max. cutting length:	550 mm
Water pump:	G1, 230V, 50/60 Hz, 35 Watt
Transport wheels:	yes
Dimension:	1180x730x1620mm
Weight:	85 kg

Powerful ALU-block saw, for cutting depth up to 220 mm

Technical data- Information

- 3-phase motor, 400V, 50 Hz with overheat protection
- laser cutting indicator for straight and exact cuts
- large cutting table
- big transport wheels for easy transporting on the jobsite
- legs will stay at the machine during transport
- cutting depth up to 220 mm
- electric water pump
- handle for moving the cutting table
- angle stop
- more than 20% less weight against standard machines

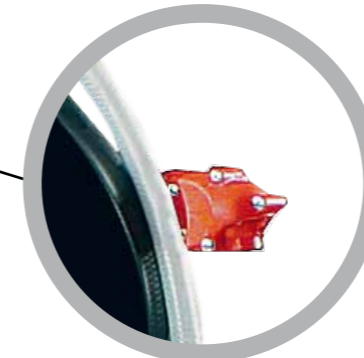

laser cutting device



aluminium frame saves 20 % weight against standard machines




600 mm diamond blade
220 mm cutting depth



plastic water tub - saves total weight




removeable legs

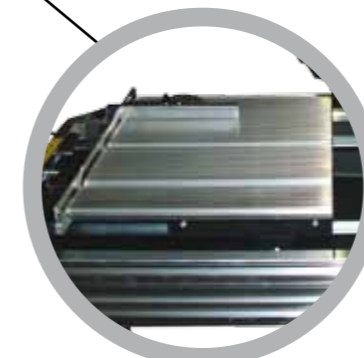

huge cutting table

Technical data:	GÖLZ STA600
Motor:	3-phase, 400 V, 50 Hz
Power:	4,0 kW (5,5 HP)
Max. cutting depth:	220 mm
Max. blade size:	600 mm x 25,4
Max. cutting length:	750 mm
Water pump:	G1, 230V, 50/60 Hz, 35 Watt
Transport wheels:	yes
Dimension:	800x1200x1030 mm
Weight:	80 kg

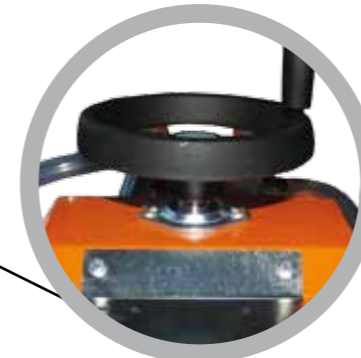

cutting depth adjustment by hand wheel




cutting head adjustable up to 45°




transport wheels for easy loading



electric water pump

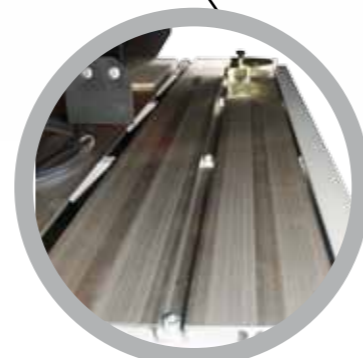

removable cutting table made in zinc coated profiled sheetings

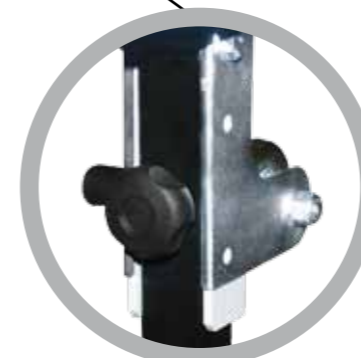

foldable legs

The professional, aluminium lightweight bridge saw with different cutting length

Technical data- Information

- cutting head carrier, mounted on solid cast iron holder, running on two steel rails with exact guidance
- removable cutting table made in zinc coated profiled sheetings
- foldable legs, zinc coated
- transport handles
- transport wheels for easy loading on the jobsite
- hand wheel for adjusting the cutting depth
- adjustable angle stop
- adjustable cutting length

Accessories:

lateral stop (adjustable angle stop)



lateral roller extension and lateral flat extension arm



GÖLZ ST85A / ST100A / ST120A

* Aluminium lightweight version

Type	Cutting length	Cutting depth	Blade size	Motor	Dimension (mm)	Weight
ST85A	850 mm	110 mm	350 mm	2,2 kW (3 HP), 230 V	1270x660x770	66 kg
ST100A	1000 mm	110 mm	350 mm	2,2 kW (3 HP), 230 V	1400x660x770	79 kg
ST120A	1200 mm	110 mm	350 mm	2,2 kW (3 HP), 230 V	1600x660x770	115 kg

GÖLZ ST150*/ ST200*

*230 V or 400 V

Type	Cutting length	Cutting depth	Blade size	Motor	Dimension (mm)	Weight
ST150	1500 mm	110 mm	350 mm	2,2 kW (3 HP), 230 V	1970x660x770	180 kg
ST200	2000 mm	150 mm	450 mm	2,2 kW (3 HP), 230 V	2500x880x770	260 kg



powerful 5,5 kW motor



cutting depth 260 mm
(blade size 650 mm)



removable water tub, zinc coated



crane eye



4 transport wheels - 2 with parking break


Powerful block saw for the long term use on the jobsite

Technical data- Information

- torsion free chassis with 4 crane eyes
- sprung cutting head
- cutting depth adjustable by manual lever
- cutting cart with steel bearing rollers
- handle for moving the cutting cart
- professional water pump
- adjustable angle stop
- 4 transport wheels, 2 with parking break
- removable water tub, zinc coated

Technical data:	GÖLZ BS650
Motor:	3-phase, 400 V, 50 Hz, 16 A
Power:	5,5 kW (7,5 HP), IP54
Max. blade size:	650 x 60 mm
Max. cutting depth:	260 mm
Max. cutting length:	500 mm
Size of cutting table:	610x670 mm
Feed:	manual
Water pump:	S3, 230V, 50/60 Hz, 60 Watt
Flange-Ø:	120 mm
RPM:	1020 min ⁻¹
Dimension:	1600x800x1500 mm
Weight:	230 kg

Powerful block saw for the long term use on the jobsite

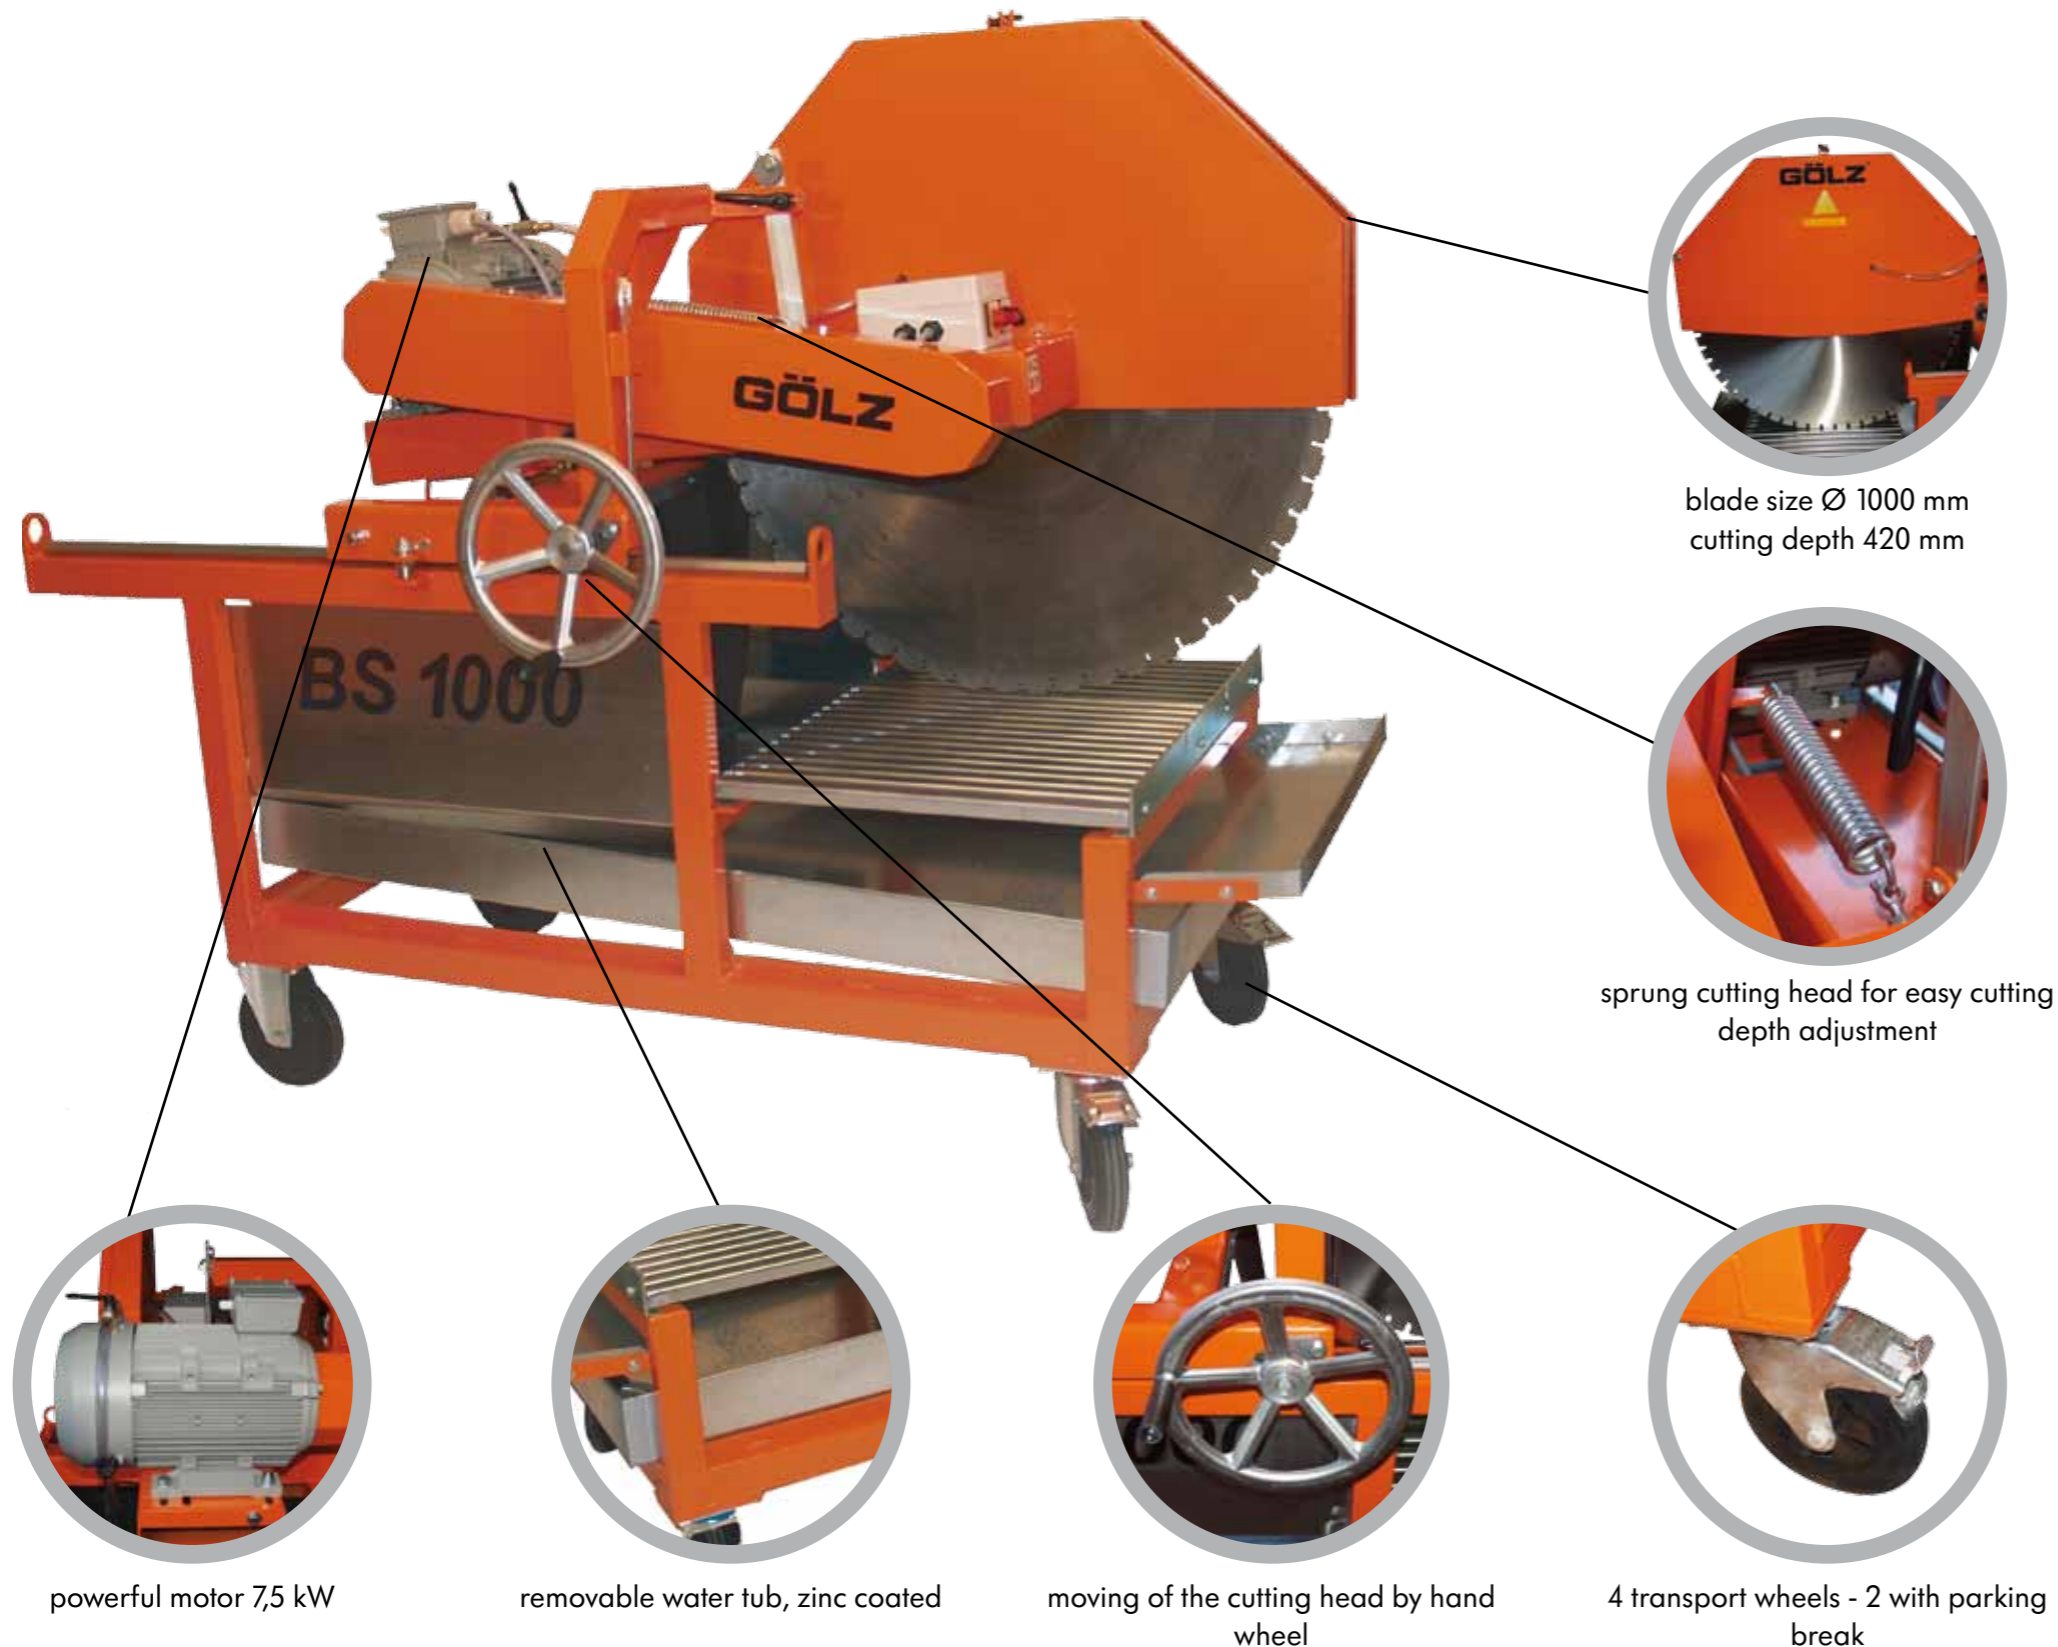

Technical data- Information

- torsion free chassis with 4 crane eyes
- cutting depth adjustable by manual lever
- sprung cutting head for cutting depth adjustment
- professional water tube
- adjustable angle stop
- cutting head with steel bearing rollers
- 4 transport wheels, 2 with parking break
- removable water tub, zinc coated

Technical data:	GÖLZ BS1000
Motor:	3-phase 400 V, 50 Hz, 32 A
Power:	7,5 kW (10 HP), IP54
Max. blade size:	1000 mm x 60 mm
Max. cutting depth:	420 mm
Max. cutting length:	600 mm
Size of cutting table:	610x840 mm
Feed:	Handwheel at side
Water pump:	S3, 230V, 50/60 Hz, 60 Watt
Flange-Ø:	160 mm
RPM:	990 min ⁻¹
Dimension:	2000x1100x1550 mm
Weight:	280 kg

GÖLZ®



GÖLZ GmbH

Postfach 26 | 53938 Hellenthal

Dommersbach 51 | 53940 Hellenthal-Blumenthal

Phone +49 (0) 2482 - 120 | Fax +49 (0) 2482 - 12 222

Mail info@goelz.de | Internet www.goelz.de

