


# PVE / PVE-D

Poker vibrator

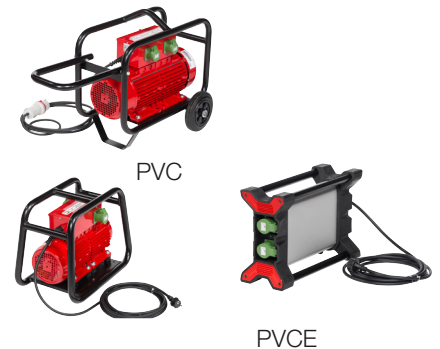

## PVE

Electric poker vibrator for connection to external frequency converter.

- Poker vibrator for all types of casting
- High centrifugal force provides a degree of compaction
- Thermal protection on all phases protects the motor.
- High insulation class on the electric motor protects it at high temperatures.
- Poker head and end cap made of hardened high quality steel for long life-time.
- Hose length: 5 m is standard length, other lengths on request.
- Electric cable length, 10 m

## PVE-D (pistol grip)

Electronic poker vibrator with integrated converter and pistol grip, de-vibrated pistol handle

- Ergonomic design, comfortable to work with.
- De-vibrated handle with low vibration levels allow for long working time without interruptions

## TECHNICAL DATA

## SWEPAC PVE

Fits converter type	PVC and PVCE
Frequency	200 Hz
Speed	12 000 rpm

Tube diameter/length	Kapacitet / Centr. force
38 mm / 369 mm	20 m <sup>3</sup> /h / 1 500 N
50 mm / 363 mm	30 m <sup>3</sup> /h / 3 300 N
58 mm / 430 mm	35 m <sup>3</sup> /h / 5 600 N
65 mm / 395 mm	40 m <sup>3</sup> /h / 7 000 N

## TECHNICAL DATA

## SWEPAC PVE-D

Hose length, standard	0.4 m
Total length	1.0 m
Voltage	42V, 1-phase
Electric cable, length	15 m

Tube diameter	38, 50, 58, 65 mm
---------------	-------------------

## Hand-Arm-Vibration

## HAV-value

Tubdiam	Typ	Acceleration m/s <sup>2</sup>
38	PVE-D	0.41*
	PVE	1.4**
50	PVE-D	0.56*
	PVE	1.8**
58	PVE-D	0.48*
	PVE	2.3**
65	PVE-D	0.6*
	PVE	2.7**

\*) Measured on handle

\*\*) Measured on the hose at 2 m from the poker head

Swepac offers a wide range of models with many different engine versions and sizes suitable for any application. Swepac is quality and environment certified in accordance with ISO 9001 and 14001 and the machines are certified to the Euro Test standard by the Swedish Machine Testing Authority. Information about the company and our products can be found on our home page at: [www.swepac.com](http://www.swepac.com). We retain the right to change the technical specifications without any prior notification.