

# ***ELECTRIC SUBMERSIBLE DEWATERING PUMPS***

WEDA range (50 Hz)

*Sustainable Productivity*

*Atlas Copco*



# WEDA dewatering pumps

WEDA pumps and accessories were designed for an extensive range of dewatering applications, across multiple industries. They provide the performance, reliability and ease of use you need. WEDA pumps feature a built-in starter and motor protection system along with optional automatic level control. Adjustable wear resistant rubber diffusers and hardened high chrome impellers ensure durability in tough environments.

WEDA pumps are made for durability. The unique sealing system and modular design make them one of the most flexible pumps on the market. Easy to use and maintain, WEDA pumps promise optimal performance. The WEDA ISP (Instant Service Pack) is the optimum maintenance solution and can be easily fitted at the job site.

With the ability to handle flows up to 16.500 l/min and a power rating up to 54 kW, WEDA pumps are the perfect partner for your dewatering needs.



POWERFUL & PORTABLE



DESIGNED  
FOR EASY  
SERVICE



250-16.500 l/min

Atlas Copco

\*Not all features and options mentioned are available on the small range. Please check data sheets for exact details.

# The WEDA+ range

The WEDA+ range includes all of the characteristics customers have come to expect from existing WEDA pumps; with the addition of new features that have been developed to take performance to the next level. Benefits include higher efficiency, simplified maintenance and increased capacity.


Across all models, a new feature of the range is rotation control and phase failure protection. This innovation negates the risk of the impeller rotating in the wrong direction and will stop the pump in event of phase failure.


The WEDA range is a plug and play solution but we have taken the WEDA+ models to the next level. This includes the adding of a new cable entry system, allowing the use of a wider range of cable configurations.

WEDA+ models feature a new, improved aluminium alloy with higher corrosion resistance. This increases robustness and lifetime, even when tackling the toughest of applications. We have also improved performance when it comes to solid handling and reduced the risk of clogging.



UP **15%**  
LIGHTER 

UP TO  
**20%**  
SMALLER 

UP TO  
**20%** LESS  
ELECTRICITY  
CONSUMED 

# WEDA standard features



- Reinforced cable entry

- Adjustable discharge connection, 180° or 90°

- Built-in run capacitor/contactor

- Easy access to the electrical components

- Low friction seals


- Class F insulated stators with thermo switches in all windings

- External plug for grease filling

- Adjustable lower diffuser made from wear resistant nitrile rubber

- High-quality chrome clog free impeller

# WEDA+ extended features

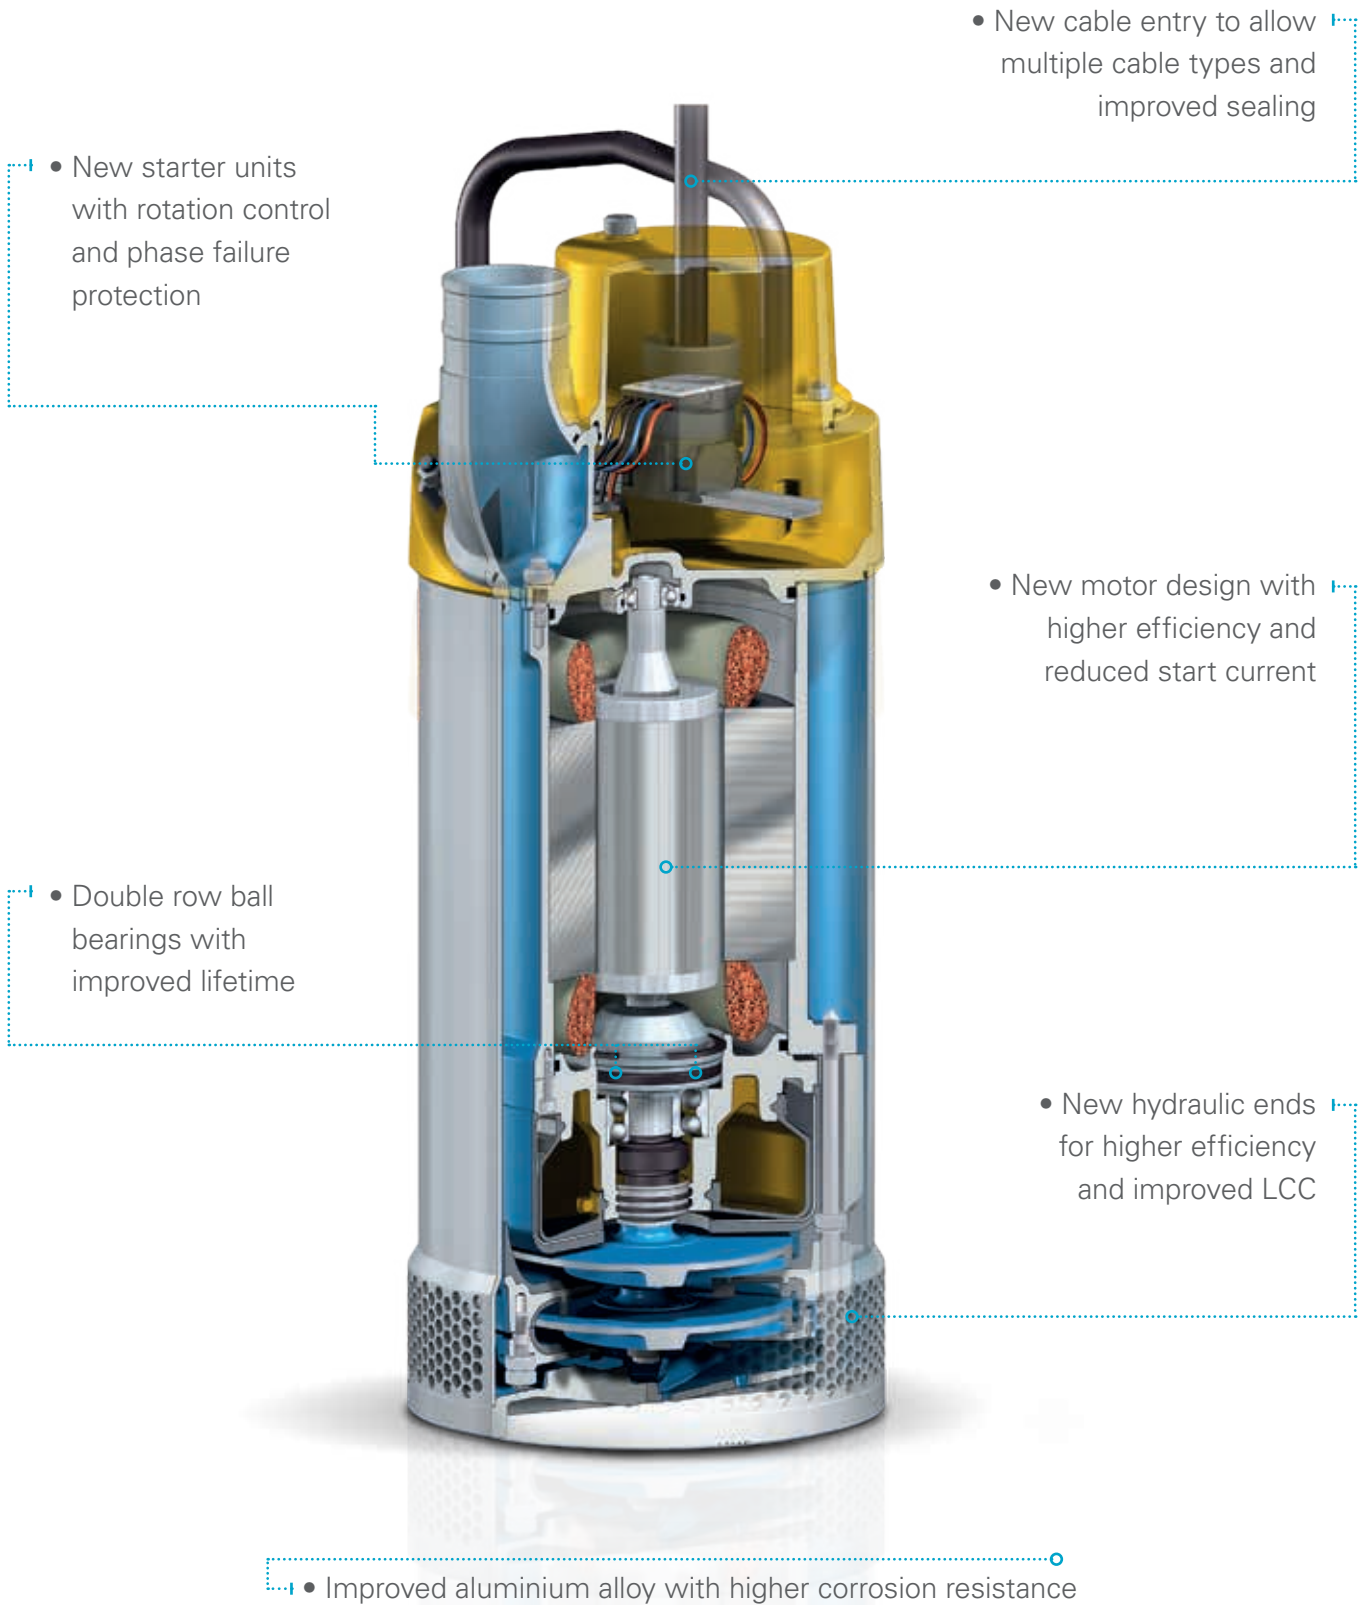


## Medium and large WEDA range pumps



### TECHNICAL DATA

Specifications		WEDA 10 NH		WEDA 30 LH		WEDA 30 NH		WEDA 40	WEDA 50+		WEDA 60+		
		Single phase	Three phase	Single phase	Three phase	Single phase	Three phase	Normal head	Normal head	High head	Normal head	High head	Super high head
Max. head	m	15	15	16,5	16,5	23	23	21	24	39	29	38	60
Max. flow	l/min	470	480	1250	1250	850	850	1320	2300	1200	2600	1500	1050
	m <sup>3</sup> /h	28	29	75	75	51	51	79	138	72	156	90	63
Rated output	kW	1	1	2	2	2	2	3	5,6	5,6	7,5	7,5	7,5
Max. power input	kW	1,2	1,2	2,6	2,5	2,6	2,5	3,4	6,6	6,6	8,8	8,8	8,8
Rated current (110v)	A	13	-	-	-	-	-	-	-	-	-	-	-
Rated current (230v)	A	6,1	4	11	7,3	11	7,3	10	19,3	19,3	26,5	26,5	26,5
Rated current (400v)	A	-	2	-	4	-	4	5,3	11,1	11,1	14,7	14,7	14,7
Rated current (500v)	A	-	1,8	-	3,6	-	3,6	4,4	8,6	8,6	11,8	11,8	11,8
Shaft speed	rpm	2900	2900	2900	2900	2900	2900	2900	2880	2880	2890	2890	2890
Discharge connection	in	2"	2"	3"	3"	3"	3"	3" (4")	4" (3")	3" (4")	4" (3")	3" (4")	3" (4")
Max solid handling size	mm	4	4	7	7	7	7	7	8	8	8	8	8
<b>Weight and dimensions</b>													
Weight	kg	12,5	12,5	20	20	20	20	25	55	55	61	61	62
Length	mm	372/442 (110v)	372	503	503	476	476	503	720	720	760	760	760
Width	mm	222	222	286	286	286	286	286	330	302	330	302	302
Circumference	mm	183	183	220	220	220	220	220	278	278	278	278	278

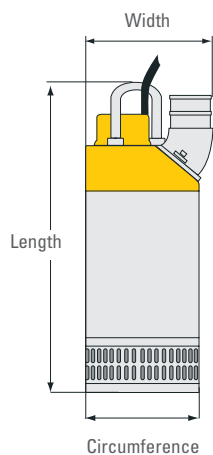

### TYPICAL APPLICATIONS

- Mining and tunneling
- Offshore





**TECHNICAL DATA**

		WEDA 70		WEDA 90		WEDA 100	WEDA 60S
Specifications		Low head	High head	Low head	High head	Normal head	Normal head
Max. head	m	32	65	46	96	42,5	23
Max. flow	l/min	4750	1583	6777	2111	16.200	952
	m <sup>3</sup> /h	285	95	407	127	972	57
Rated output	kW	11,8	11,8	26,5	26,5	54	7,5
Max. power input	kW	14	13,8	29,3	29,3	65	8,5
Rated current (110v)	A	-	-	-	-	-	-
Rated current (230v)	A	-	-	-	-	-	26
Rated current (400v)	A	23	25	45	47	110	16
Rated current (500v)	A	18	18	38	38	80	13
Shaft speed	rpm	2900	2900	2900	2900	1450	2900
Discharge connection	in	6" (4")	4" (6")	6" (4")	4" (6")	10"	3" (4")
Max solid handling size	mm	7	7	7	7	12	50
Weight and dimensions							
Weight	kg	95	95	180	180	510	70
Length	mm	911	911	1058	1058	1412	760
Width	mm	395	395	437	437	650	330
Circumference	mm	360	360	401	401	600	278

• Construction

• Industrial


• Emergency

• Maintenance




# Pump curves


**WEDA 10**

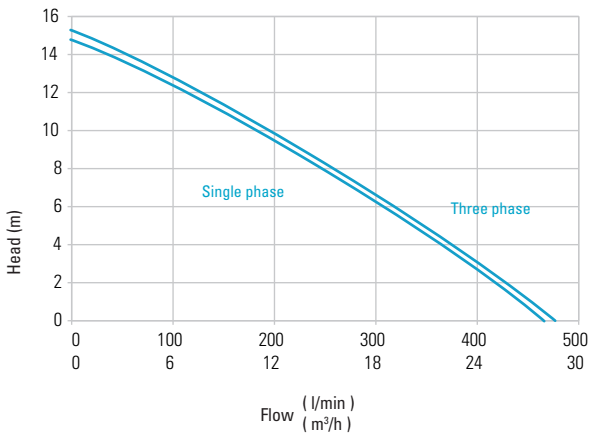


**WEDA 30**

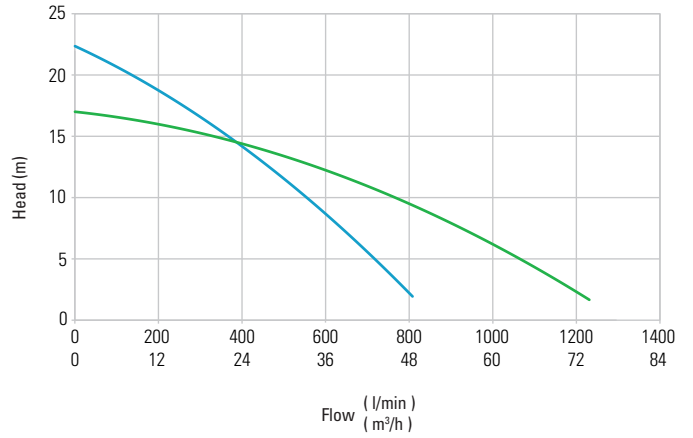


**WEDA 40**

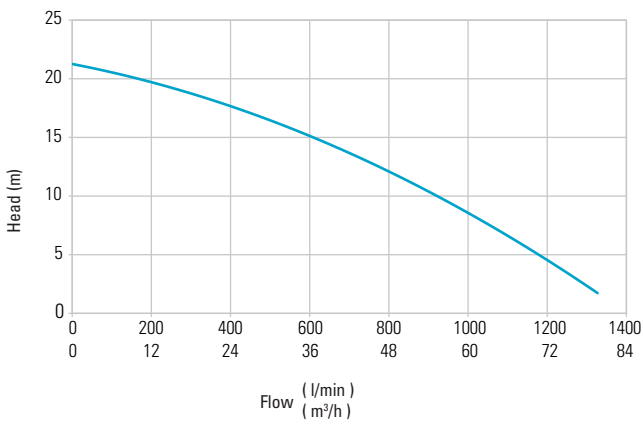


**WEDA 50+**

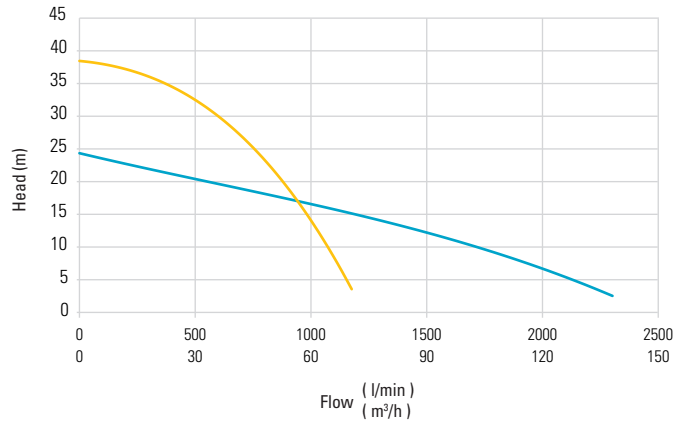

**WEDA 60+**

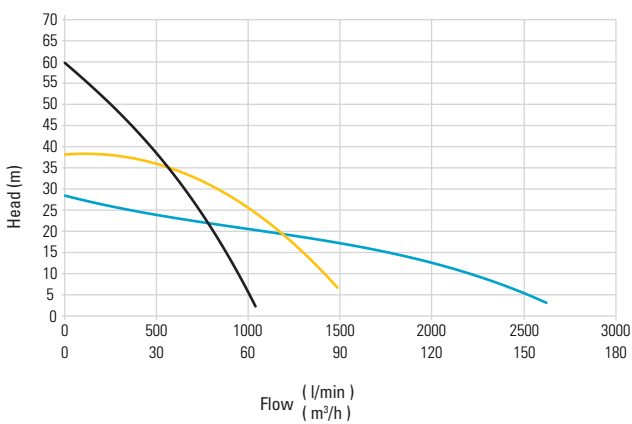

**WEDA 70**

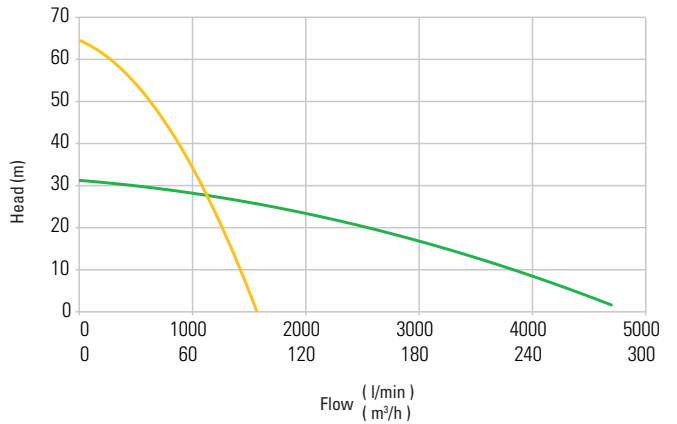


- Super high head
- High head
- Normal head
- Low head


According to ISO 9906 - ANNEX A




## WEDA 90

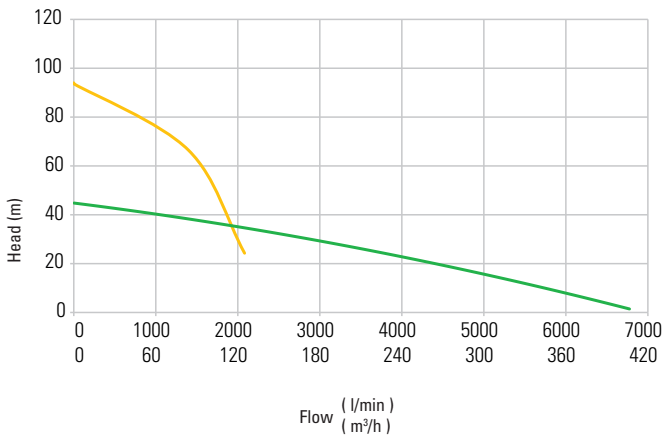

## WEDA 100

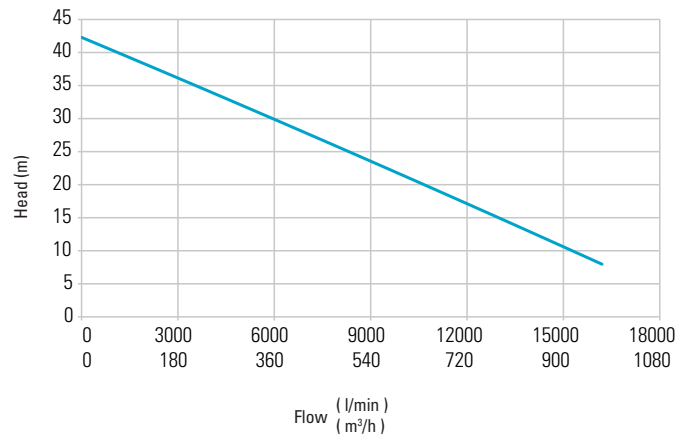

## WEDA 60S

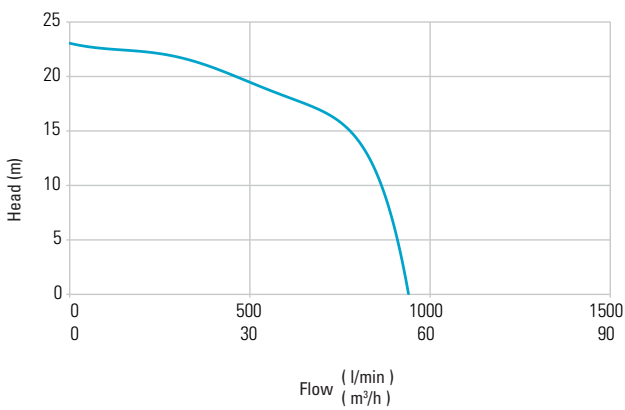

## Unique Sealing System

You can change seals, impeller and other parts in minutes. For larger pumps, the WEDA ISP (Instant Service Pack) is the optimum maintenance solution. The ISP contains the seals, bearing oil and oil housing and can easily be changed at the work site.

## Modular Design

Machined slots make it easy to separate the various parts of each pump. All stainless steel bolts and nuts used are the same size. This makes it possible to use one effective tool to complete the entire operation.

# WEDA Small range

The range of WEDA Small pumps are portable, light weight and easily maintained. They provide a simple, cost effective solution for light duty applications. The design of the pump's outer jacket for cooling and thermo-protection keeps it running safely under various conditions. The triple shaft seal assures a long life time and the semi vortex wet-end minimizes maintenance.




## TECHNICAL DATA




		WEDA 04	WEDA 04B	WEDA 04S	WEDA 08	WEDA 08S
Specifications		Normal head	Normal head	Normal head	Normal head	Normal head
Max. head	m	11,3	12	10,5	15,2	13
Max. flow	l/min	250	225	270	325	317
	m <sup>3</sup> /h	15	13,5	16,2	19,5	19
Max. power input	kW	0,65	0,65	0,65	1,2	1,2
Rated current (230v)	A	2,8	2,8	2,8	5,2	5,2
Discharge connection	in	2"	1" (2" optional)	2"	2"	2"
Max solid handling size	mm	7,5	4,5	25	7,5	25
Weight and dimensions						
Weight	kg	9	9,5	10	12,4	13
Length	mm	340	415	375	358	416
Width	mm	209	253	277	210	277
Circumference	mm	182	220	241	183	241

# Performance curves


 **WEDA 04**

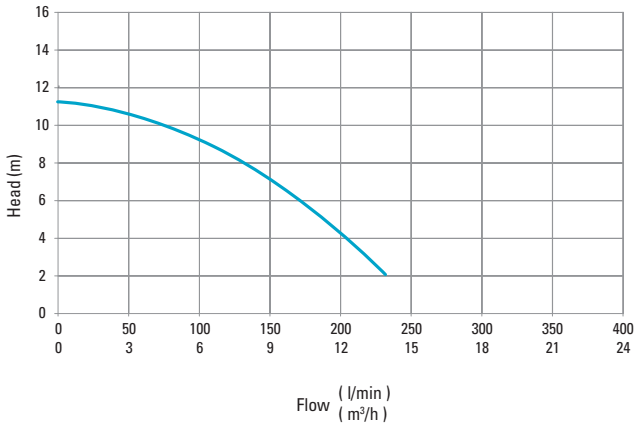


 **WEDA 08**

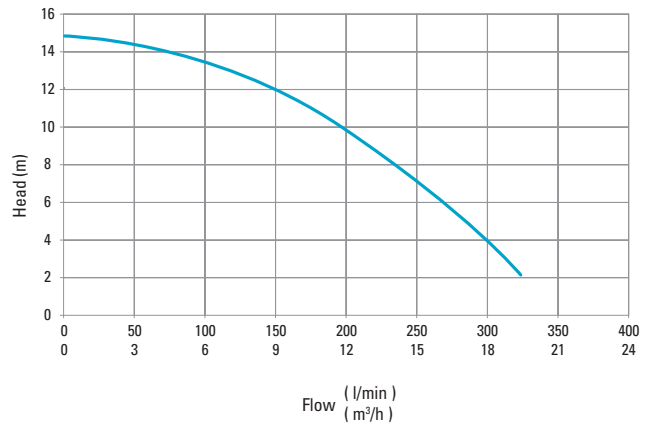


 **WEDA 04S**

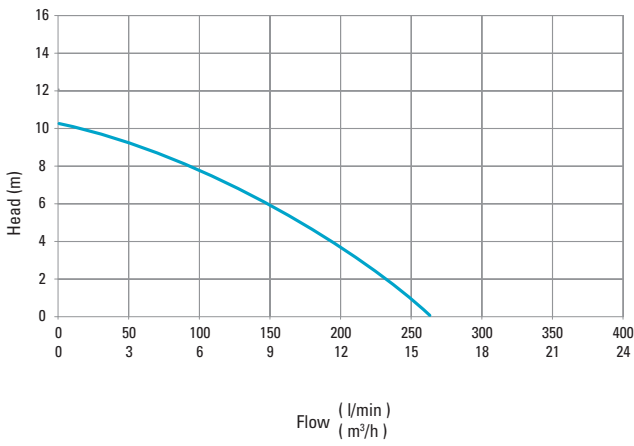

 **WEDA 08S**

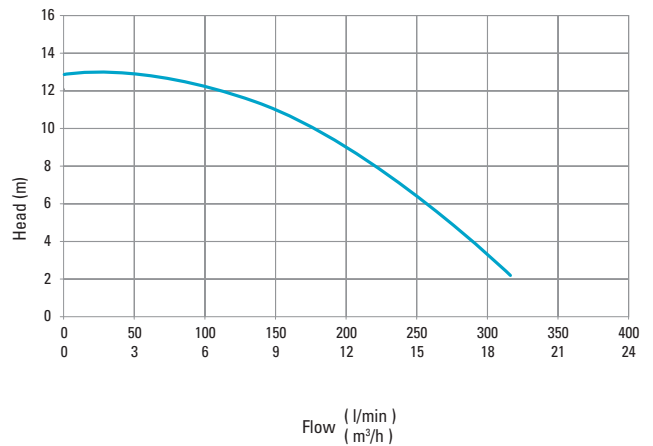

 **WEDA 04B**

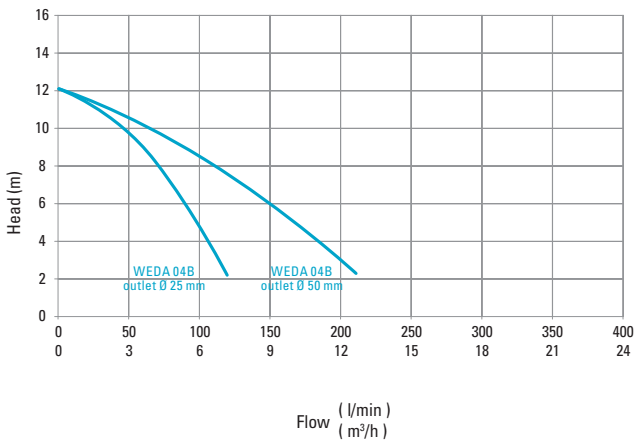

 **KEY FEATURES**

- Dry running capacity
- Thermal protection on motor
- Built-in high torque capacitor
- Double mechanical shaft seals constructed from silicon carbide
- Additional lip seal for extended lifespan of the primary seal
- Easily accessed impeller and pump housing

# Portable Energy Solutions Portfolio

## AIR COMPRESSORS

### READY TO GO

- 1-5 m<sup>3</sup>/min
- 7-12 bar



### VERSATILITY

- 5,5-22 m<sup>3</sup>/min
- 7-20 bar



Diesel and electric options available

### PRODUCTIVITY PARTNER

- 19-116 m<sup>3</sup>/min
- 10-345 bar



## GENERATORS

### PORTABLE

- 1,6-12 kVA



### MOBILE

- 9-1250\* kVA



### INDUSTRIAL

- 10-2250\* kVA



\*Multiple configurations available to produce power for any size application

## DEWATERING PUMPS

### ELECTRIC SUBMERSIBLE

- 250-16.500 l/min



### CENTRIFUGAL

- 833-23.300 l/min



Diesel and electric options available

### SMALL PORTABLE

- 210-2500 l/min



## LIGHT TOWERS

### LED



### METAL HALIDE



### ELECTRIC



## Committed to sustainable productivity

Atlas Copco's Power Technique business area has a forward-thinking philosophy. For us, creating customer value is all about anticipating and exceeding your future needs – while never compromising our environmental principles. Looking ahead and staying ahead is the only way we can ensure we are your long term partner.

[www.atlascopco.com](http://www.atlascopco.com)

Atlas Copco